

CSM 5521

Power Rating: 800VA⁽¹⁾⁽²⁾


PLATFORM  **PARAMETERS**

Core Size:	EE 55
Core Area:	3.54cm ²
Path Length:	12.36cm
Core Volume:	43.75cm ³
Winding Area:	2.93cm ²


Samples Available on Request

techsales@cramercoil.com
(262) 268-2150 (Inside Sales)
(262) 268-4100 (FAX)

SUGGESTED PCB LAYOUT⁽³⁾

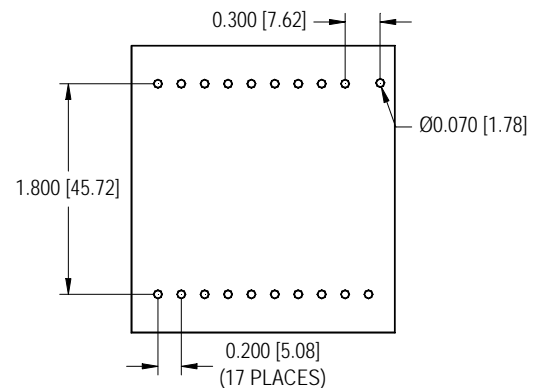

Note:
Unless otherwise specified, tolerances are
x.xxx = 0.003 [0.08]

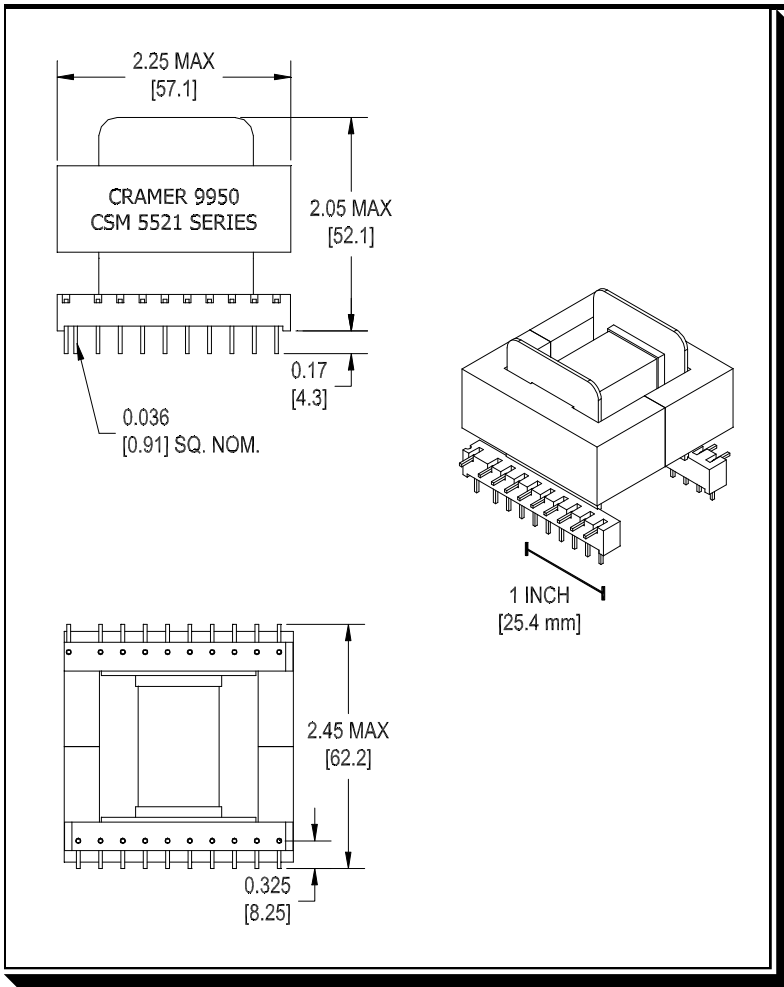

Notes:
Dimensions: inches [millimeters] (entire page)

Platform Features

- * Utilizes Economical, Efficient Construction Materials
- * Industry Standard Footprint
- * UL, CSA, VDE and IEC Compatible
- * UL Approved Class B Insulation System Available (System Designation C5; File #E110339)
- * Power Rating up to 800VA⁽¹⁾⁽²⁾
- * For High Isolation Applications, Standard Platform Provides up to 5 Isolated Secondaries or 9 Common Secondaries
- * Up to 4,000 VRMS Isolation (standard configuration) between Windings
- * Lead Time 2 to 6 Weeks

(1) 800VA at 100kHz Uni-polar, 1600VA at 100kHz Bi-polar.

(2) Energy Storage Limit: 25,000 Micro-joules (0.5 LI²).

(3) Final responsibility for the correct PCB layout resides with the user.